

KRM 6410B mast section


Flash Product

New 10 m mast section - 2 m masts type K600

The KRM 6410B mast section, developed at the same time as the new ZX 640 cross-shaped base and the new fixing angles P 63A / P 800B (as well as equivalent reusable fixing angles) completes the range of Potain mast sections of 2 m section. Combined with these new bases, it improves the hook heights of cranes on 2 m masts.

KRM 6410B

- Type K mast section, 2 m cross-section
- Reinforced, monoblock, non-telescoping mast section, with lugs
- Length: 10 m / Weight: 7,100 kg

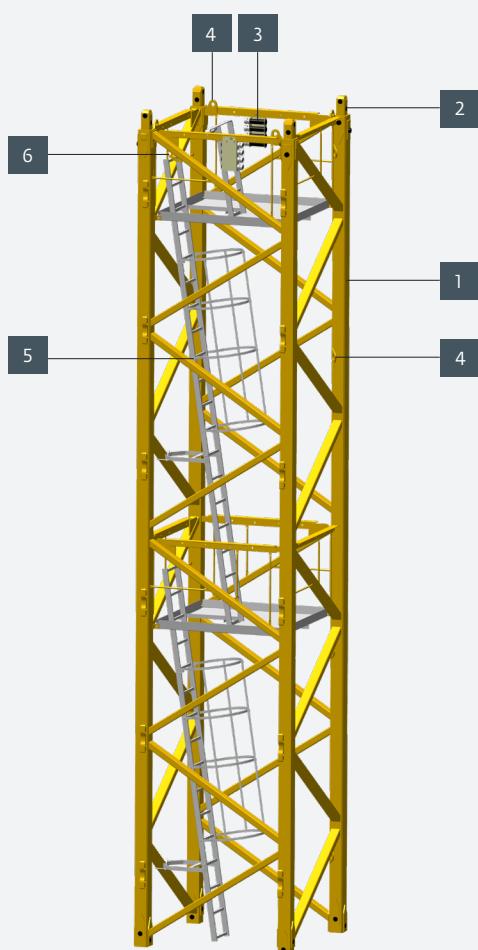

CHARACTERISTICS

1. Boxed iron angle uprights 150 x 18 mm + reinforcement plates
2. 4-pin fishplates
3. Pin Ø 59/60 mm, standard or Tirax (position of the pin supports allowing passage of the Cab-IN internal lift)
4. Slinging eyes for horizontal and vertical handling of the mast section
5. Inclined aluminum ladders with back loop
6. Mast section identification plate (name + weight)

Available in Cab-IN basic mast section and extension mast

COMPATIBILITY

- All bases adapted to 2 m type K masts (fixing angles, reusable fixing angles, chassis and cross-shaped base)

INTERCHANGEABILITY

- Can replace two 5 m mast sections or one 10 m mast section (type B or E) of lower strength (example : 2 x KRMT 649A ou 1 x KM 649E)
- Mandatory, must under no circumstances be replaced in the mast compositions in which it is found ("strong" mast section used to obtain maximum hook heights on the new bases)

SALES

- Price codes

> Standard mast section:	ML179
> Cab-IN basic mast section:	MB111
> Cab-IN extension mast:	ME134
- Orders can already be placed now